

1110

food service tapware

HEAVY DUTY FIT FOR PURPOSE PERFORMANCE AND EFFICIENCY

- Pre-Rinse Assemblies
- Hands Free Foot & Knee
 Operated Tapware

pre-rinse assemblies

Built tough for the demands of busy commercial kitchens where performance and reliability is crucial. Enware's Pre-Rinse Units incorporating Ultra-Rinse provide a wide range of options to suit your kitchen requirements.


Choose from wall or bench mounted configurations, with optional pot fillers for practical use of your sink area.

FEATURES:

- Proven durability in some of Australia's leading restaurants and fast food stores
- Moulded rubber nozzle guard helps reduce the risk of damage from accidental knocks
- Easy to use, ergonomic handle design
- Chisel style spray pattern rapidly removes the food excess for less time spent at the sink
- High water efficiency, reduces water costs and the energy costs for heating the water
- Self-closing trigger spray turns off water when not in use
- Stay open ring keeps spray on for easier prolonged use

enware's ultra-rinse pre-rinse spray

Designed and manufactured in Australia to achieve an impressive 6-Star water efficiency rating, the Ultra-Rinse incorporates advanced technology in its easy to use ergonomic design. The superior high-velocity spray pattern cleans faster and uses less water: with the 6-Star WELS rating reflecting a flow rate of just four litres per minute, significant water-heating energy savings are an added bonus.





Enware Tapware is manufactured to the exacting WaterMark standard AS/NZS3718 and AS4020.

- Dual check valve for backflow prevention
- Premium quality hose, brass and stainless steel to give you maximum strength and dependability
- Modular design can easily be configured to meet your specific needs
- Australian made so parts are always available for an even longer serviceable life.



technical information

Minimum–Maximum Working Pressure (AS/NZS 3500)*	50-500kPa
Maximum Static Pressure	1200kPa
Maximum Working Temperature	90°C

For optimum performance it is recommended that the control valves or taps be turned off when not in use overnight or for long periods. Complete pre-rinse assemblies incorporate a dual check valve for backflow prevention. Lever tapware control incorporate quarter turn non-rising jumper valves. *Enware products are to be installed in accordance with AS/NZS3500.

water efficiency

POT FILLER WITH MANUAL SHUT-OFF



Pot Filler supplied with a 3 star (8lpm) water efficiency rating.







WELS 6 Star (4lpm) water efficiency rating.

pre-rinse assemblies - options and parts

Enware's modular design and Australian manufacturing means we can easily customise our products to meet specific application requirements. This section is provided as a guide to the options available and our customer service team can help with your special requirements.

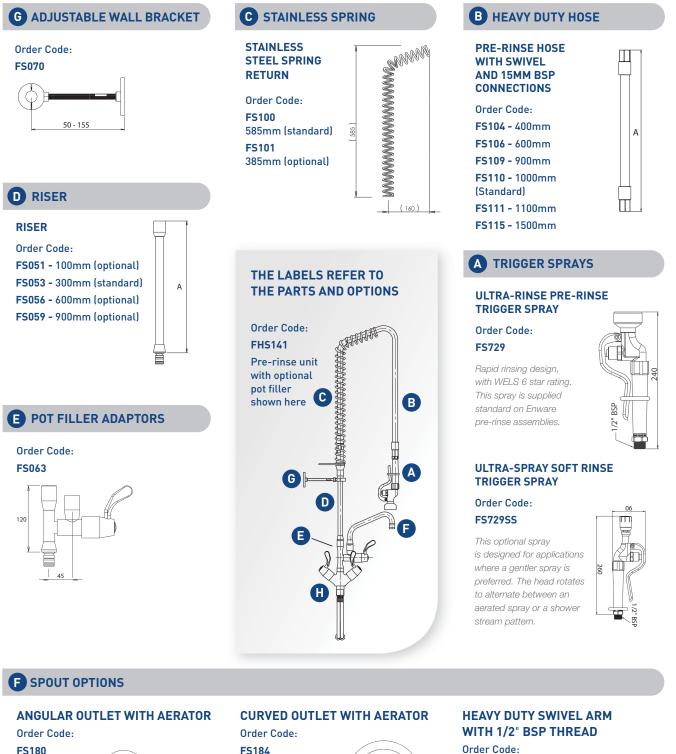








FS185

FS188 A 150mm B 55mm

FS187






BASE OPTIONS

Enware's pre-rinse assemblies are the foundation of creating your pre-rinse assembly. Choose from the following standard bases for a bench or wall mounted unit.


HOB MOUNTED



PRE-MIX SINGLE BASE Order Code: FS011


For complete assembly refer to order codes: FHS011 FHS111 — with pot filler

WALL MOUNTED




PRE-MIX SINGLE BASE Order Code: FS021

For complete assembly refer to order codes: FWS011. FWS111 — with pot filler




HOB MOUNTED EXPOSED MIXER Order Code: FS012

For complete assembly refer to order codes: FHS021 FHS121 — with pot filler




HOB MOUNTED CONCEALED MIXER BASE Order Code: FS013

For complete assembly refer to order codes: FHS031 FHS131 — with pot filler




HOB MOUNTED DUAL MIXER Order Code: FS015

For complete assembly refer to order codes: FHS041 FHS141 — with pot filler



WALL MOUNTED EXPOSED MIXER Order Code: FS022


For complete assembly refer to order codes: FWS021. FWS121 — with pot filler



WALL MOUNTED CONCEALED MIXER BASE Order Code: FS023

For complete assembly refer to order codes: FWS031 FWS131 — with pot filler


also in this section

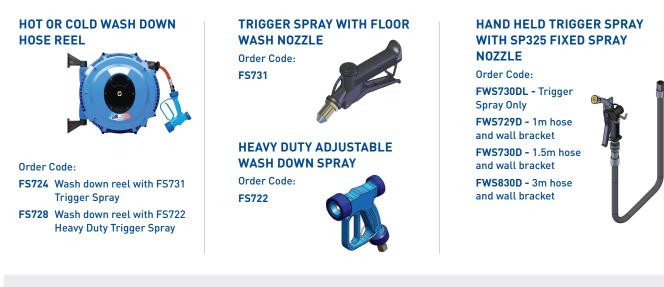


RELATED PRODUCTS

Lever Action Series - 150 and 200mm - Page 107 Lever Action Expo Series - Page 118 Electronic Touch Button and Sensor Tapware — Page 239 Knee Operated and Foot Operated Tapware — Page 159 Time Flow Tapware — Page 82



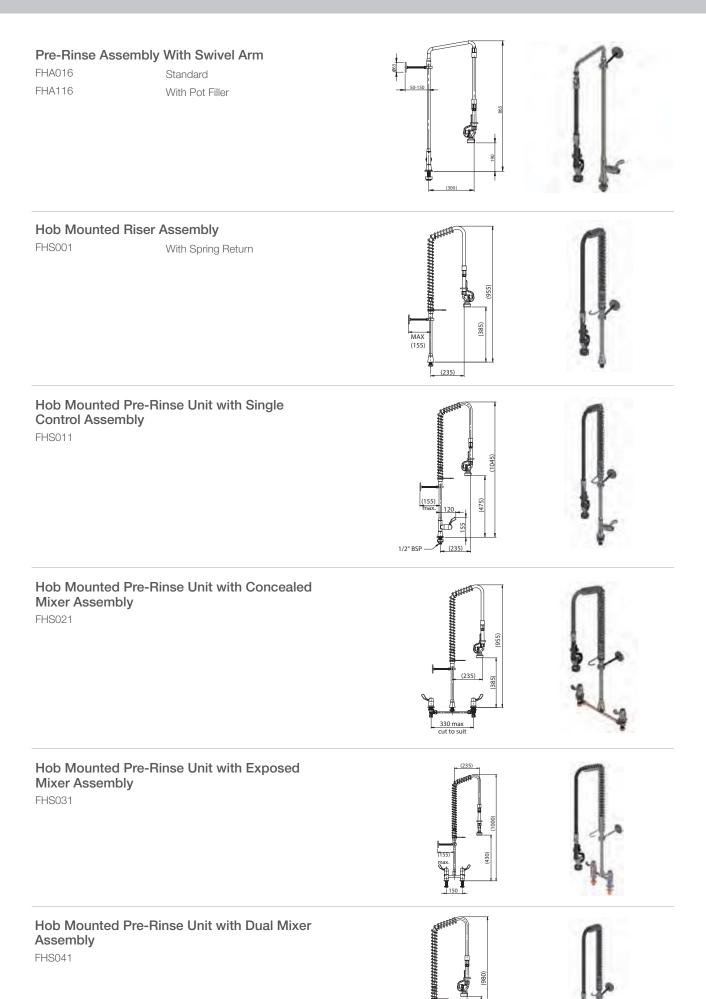


Hob Mounted Riser Assembly with Pot Filler FHS101






Hob Mounted Pre-Rinse Unit with Single Control Assembly with Pot Filler FHS111






Hob Mounted Pre-Rinse Unit with Concealed Mixer Assembly with Pot Filler FHS121






Hob Mounted Pre-Rinse Unit with Exposed Mixer Assembly with Pot Filler FHS131






Hob Mounted Pre-Rinse Unit with Dual Mixer Assembly with Pot Filler FHS141






Hob Pre Rinse Assembly with Pot Filler






VP Dual Mixer with Diverter

VP370C Jumper Valve Diverter with SP012 (Coles)




Pot Filler & Riser FS760

Hob





Pre Rinse Wall Riser Assembly FWS001



(235)


Ø65 1/2" BS




Pre Rinse Wall Pre Mix Assembly FWS011

Pre Rinse Wall Concealed Mixer Assembly FWS021


Pre Rinse Wall Exposed Mixer Assembly FWS031








Pre Rinse Wall Riser Assembly With Pot Filler FWS101





Pre Rinse Wall Pre Mix Assembly With Pot Filler FWS111




(225




 Pre Rinse Wall Concealed Mixer With Pot Filler

 FWS121
 Standard






Pre-Rinse Wall Concealed Mixer Assembly With Pot Filler – Less Riser FWS121C Coles Pattern






Pre Rinse Wall Concealed Mixer Assembly With Pot Filler – Less Riser FWS121W Woolworth's Pattern






Pre Rinse Wall Exposed Mixer Assembly With Pot Filler FWS131






148

Mixing Set With Jumper Valve FSJ705






Pre Rinse Wall Pre Mix Assembly FWA016 Single Control Assembly






Pre Rinse Wall Pre Mix Riser Assembly FWA056





 Pre Rinse Wall Pre Mix Assembly With Pot Filler


 FWA116
 Single Control Assembly





Pre Rinse Wall Riser With Pot Filler FWA156


Wall Exposed Jumper Valve Mixing Set With Pot Filler FS704






Mixing Set Complete

FS705 Type McDonalds



Ultra-Rinse Pre-Rinse Trigger Spray FS729






Ultra-Spray Soft Rinse Trigger Spray


FS729SS

Ultra Spray Soft Rinse Trigger Spray





Trigger Spray Handle and Screw Replacement Part FS790




Ultra-Rinse Pre-Rinse Trigger Spray - Spare Parts

FS077	Old Style Service Kit — Suits FS721
FS077NS	Service Kit Suits FS729
FS721S	Stuffing Box Assembly — Suits FS721 and FS729

Hand Held Trigger Spray – Filler Design

FWS720

Water Filler Assembly — Aldi




Adaptor Nuts

FS078	7/8m x 1/2F Chrome Plated
FS080	T&S Nut 7/8 x 20TPI x 15mm FI
FS081	T&S Nut 5/8 x 18UNF x 15mm FI
FS082	3/4 x 14 UNEF x 1/2 BSP FI
FS083	3/4 x 14 UNEF X x BSP FI

Hand Held Delrin Trigger Spray with SP325 **Fixed Spray**

FWS729D FWS730D FWS730DL


1000mm Flexible Hose and Wall Bracket 1500mm Flexible Hose and Wall Bracket Trigger Spray Only



Hand Held Trigger Spray with 3 metre Hose


FWS830D

Trigger Spray with SP325 Fixed Spray



Hot & Cold Wash Down Hose Reel with FS731 **Delrin Trigger Spray** FS724

Hose length: 12m; Inlet Hose Length: 1m







Hot & Cold Wash Down Hose Reel with FS722 Adjustable Gunner Trigger Spray

FS728

Hose length: 12m; Inlet Hose Length: 1m



Wash-down Adjustable Spray 15mm FI FS722





Delrin Trigger Spray with Floor Wash Nozzle

FS731

Floor Wash Outlet




Delrin Trigger Spray FS730 1/2 Inch

1/2 Inch F&F for attachments




Hob Mounted Riser Base FS010






Pre-Mix Single Base — Hob Mounted FS011






Hob Mounted Exposed Mixer Base





Hob Mounted Concealed Mixer Base
FS013 Concealed




1/2" BSP WITH OLIVE COMPRESSION FITTING



Hob Mounted Dual Mixer Base FS015

Dual






Wall Mounted Riser Base FS020

1/2″BŞF




Wall Mounted Pre-Mix Single Base FS021







Wall Mounted Exposed Mixer Base FS022



Wall Mounted Concealed Mixer Base FS023


Pot Filler Adaptor (excluding spout) FS063





Standard Outlet Aerated


FS180	180mm reach x 65mm height to outlet
FS181	230mm reach x 105mm height to outlet
FS182	300mm reach x 125mm height to outlet



Curved Outlet Aerated

FS184	
FS185	

150mm reach x 95mm height to outlet 200mm reach x 135mm height to outlet





Swivel Spout - Reach 350mm (Type M)


FS708

Type McDonalds




Riser		m
FS051	100mm	
FS053	300mm	
FS056	600mm	
FS059	900mm	

Spring Retainer Extension FS061





Adjustable Wall Bracket FS070 Standard





Trigger Spray Wall Bracket FS071

Trigger Spray Hook FS072

FS110

FS111

FS115

Exterior Spring G FS100 FS101	uard 585mm (Standard) 385mm (Non-Standard)	(585)	
Hose 15mm BSP	FI	ЩТ	
FS104	400mm		
FS106	600mm		
FS109	900mm		
FS110	1000mm (Ctandard)	A	

1100mm

1500mm

1000mm (Standard)

Heavy Duty Swivel A	rm for Hose Connection
FS187	300mm x 75mm height to outlet with 15 BSP
FS188	150mm x 55mm height to outlet with 15 BSP



Ш

900mm Mixing Set Hose (Type M)FS706Type McDonalds






Riser With Pot Filler Assembly (Type M)

FS707

Type McDonalds



Riser Assembly Food Service Mixer Conversion (Type M) FS709



Expo Button

FS092		
FS093		
FS094		


Hot Cold Plain



1/4 Turn Rising Jumper Valve Stuffing Box Assembly with Handle FSJ095 Expo JHS Jumper Valve Pill/Bib SBA – Hot

FSJ095

Expo JHS Jumper Valve Pill/Bib SBA — Hot Expo JHS Jumper Valve Pill/Bib SBA — Cold






Food Service Recess Adaptor

FSJ308


1/4 Turn Rising Jumper Valve






Food Service Lever Handle

For rising Jumper Valve SBA





1300 369 273 | WWW.ENWARE.COM.AU

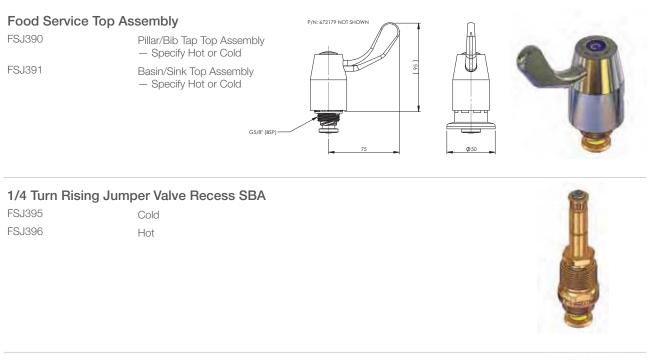

1/4 Turn Rising Jumper Valve Stuffing Box Assembly FSJ381 SBA Suits all except recessed wall

100001

SBA Suits all except recessed wall (FWS021/FWS121) — Specify Hot or Cold



1/4 Turn Non-Rising Assembly (OLD STY)	Jumper Valve Stuffing Box LE)
FS095	Hot
FS096	Cold

Quick Connection Coupling 1/2 Inch BSP Female FS733






Food Service Lever Sign Red Blue (PR) MIS620



Diverter Retrofit Kit FS064

(suits VP370C)



REF



hands free foot & knee operated tapware

Knee operated tapware is available in the Spring Action self-closing valve or the Time Flow automatic shut-off valve.

Time Flow is available in various timing options with standard cycle times as specified.

Hands free foot operated tapware is a self-closing Spring Action mechanism.

The Enware Foot and Knee tapware range is constructed from dezincification resistant (DR) brass.

water efficiency



4 star (8lpm) rating supplied standard. Also available in 3 star (9.5lpm) and 5 star (6lpm) and 6 star (6lpm) ratings.


options

VALVING OPTIONS:

- Time Flow Self Closing Valve
- Spring Action Self Closing Valve

SPOUT OPTIONS:

 Enware offer a wide variety of spouts and shower roses – please refer our Outlets Section in this Product Guide – Page 208

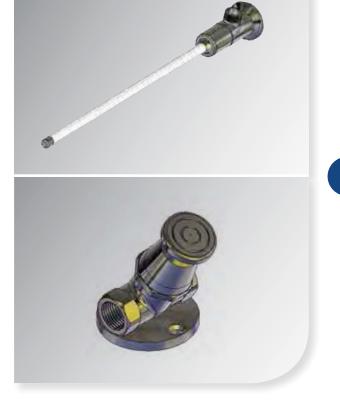




Enware Tapware is manufactured to the exacting WaterMark standard AS/NZS3718 and AS4020.

RELATED PRODUCTS

Electronic Hands Free Tapware — Page 239 Automatic Shut-Off Spring Action and Time Flow Tapware — Page 63 Outlets and Spouts — Page 208




technical information

	TIME FLOW	SPRING ACTION
Minimum–Maximum Working Pressure (AS/NZS 3500)*	50–500kPa 250–350kPa for optimum performance	50-500kPa
Maximum Working Temperature	50°C	80°C

*Tapware and showers must be installed in compliance with Australian National Plumbing Code and any local Standards. AS/NZS3500 states a maximum working pressure of 500kPa at any outlet. food service tapware


Enware-Delabie Knee Operated Lever Only 350mm TFC796

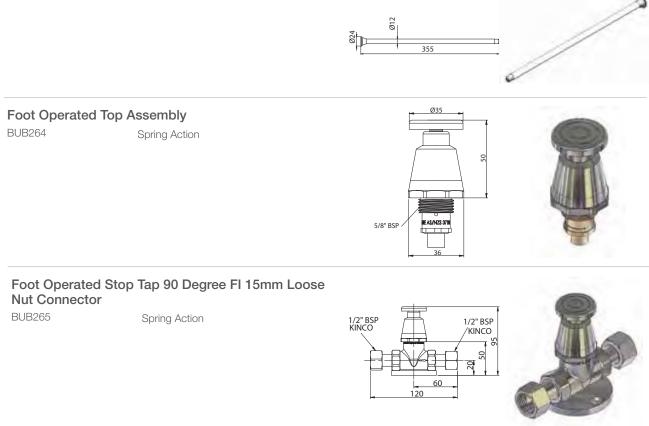

Foot Operated Stop Tap 45 Degree FI 15mm Loose Nut Connector


BUB266

Spring Action





Foot Operated StopTap 90 Degree F&F 15mmBUB268Spring Action






Knee Operated Spring Action Valve F&F 15mm
BUB268L Straight Lever

9 9 1/2" BSP 1/2" BSP




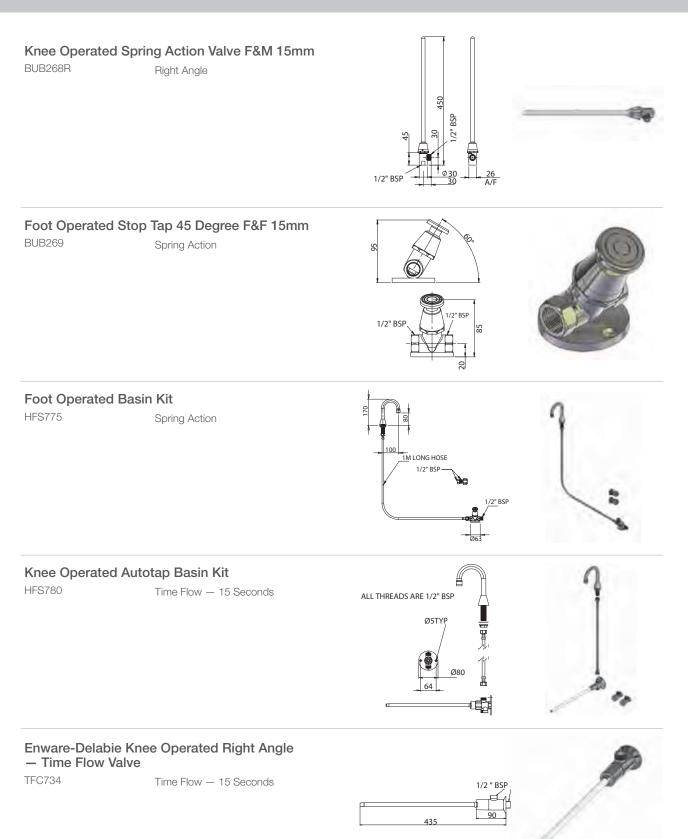

Enware-Delabie Knee Operated Straight Time Flow Valve

TFC735

Time Flow — 15 Seconds



Enware-Delabie TempoStop Time Flow Cartridge Only Replacement suits Type TFC734/735/745L/746L (not button models)

TFC791

15 Seconds Cartridge Only (For 7 or 3 seconds request when ordering)





Enware-Delabie TempoStop Service Kit - Suits TFC734/735/745/746

TFC753005 TFC797 7 Seconds 15 Seconds

