
specifications



Project:

RF7.UPF.2.SD

ReFlex Series, 2 Solid Door Upright Freezer (R290)

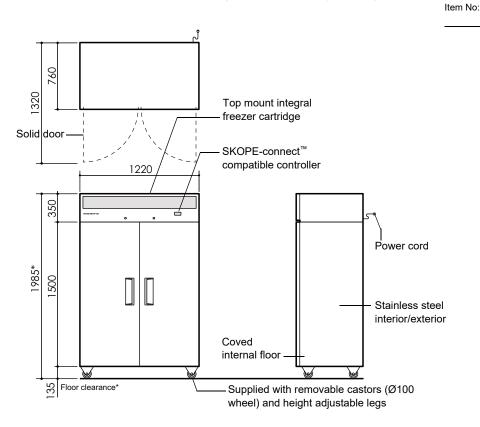

CABINET		DIMENSIONS			
Doors	2 × self-closing, lockable, solid swing doors, left and right hand	Diricitore	External	Internal	
Internal door opening	2 × door openings: 1375 mm high × 495 mm wide	Height	1985 mm*	1395 mm	
Shelves	10 × adjustable height shelves: 530 mm wide × 530 mm deep	Width	1220 mm	1395 mm	
Worktop	n.a.		760 mm		
Material	304 AISI stainless steel interior and exterior	Depth Floor area	760 mm 0.93 m ²	600 mm	
PERFORMANCE		Weight 171 kg			
Max. ambient temp.	40°C	Gross volume	921 L		
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)	Net volume	712 L		
GEMS class	5L1	* With supplied castors fitted. See height variation below			
GEMS energy consumption	10.64 kWh/24h				
GEMS annual running cost	\$1165 p.a. (@ \$0.30/kWh)	Height variation			
•		Supplied castors 1985 mm			
ELECTRICAL		Supplied height adjustable legs 1995-2035 mm No castors or legs 1850 mm			
Electrical safety climate class	5	NO Castors of legs		1650 11111	
Interior lighting	2 × 1200 mm, 12W LED light (door activated)	Dimensional tolerances			
Power cord	Supplied with 10 amp plug and 2 m lead	Before installing this	efore installing this cabinet allow the following dimensional		
Power supply	220-240 volts a.c. 50 Hz, single phase supply	tolerances:			
Current draw	5.0 amps (includes unit 4.6 amps)	Linear dimensions	Overall cabinet dimensions		
REFRIGERATION		More than 1 metre	-5 mm to +10 mm		
Controller	CCC Comment (CKODE comment ™ comment her)		Length of multiple cabinets		
	SCS Connect (SKOPE-connect [™] compatible)		At each joint	At each end wal	
Connectivity interface	<i>Bluetooth</i> [®] wireless technology	Less than 1 metre	±5 mm	+15 mm	
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0037)	More than 1 metre	-5 mm to +10 mm	+15 mm	
Refrigerant	R290/105 g (natural refrigerant)	Ventilation requirements			
Nominal capacity	725 watts	Тор	300 mm		
	450 watts/725 watts	Sides Back	Not required		
Heat rejection (Avg/peak)	450 Walls/725 Walls		Not required		

PSS0679 Rev. 1.5 Jul. 2022

SKOPE INDUSTRIES LIMITED
Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com