specifications


SIX PIP Refrigeration

Project:

Item No:

RF7.UPR.2.SD

ReFlex Series, 2 Solid Door, Upright Fridge

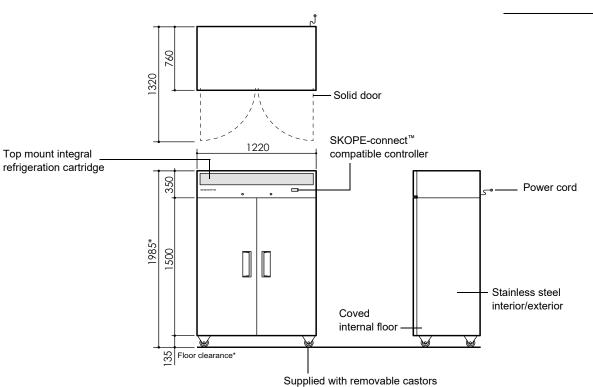

(Ø100 wheel) and height adjustable legs

CABINET		DIMENSIO	
Doors	2 × self-closing, lockable, solid swing doors. LH, RH	DIVILINGIO	
Internal door opening	2 × door openings: 1375 mm high × 495 mm wide	Height	
Shelves	10 × adjustable height shelves: 530 mm wide × 530 mm deep	Width	
Worktop	n.a.	Depth	
Material	304 AISI stainless steel interior and exterior	Floor area	
PERFORMANCE	•	Weight	
Max. ambient temp.	40°C	Gross volume	
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)	Net volume	
GEMS class	5M1	* With supplied castor	
GEMS energy consumption	3.91 kWh/24 h		
GEMS annual running cost	\$428 p.a. (@ \$0.30/kWh)	Height variation	
ELECTRICAL		Supplied castors Supplied height adjust	
Electrical safety climate class		No castors or legs	
,			
Interior lighting	2 × 1200 mm, 12W LED lights (door activated)	Dimensional toleran	
Power cord	Supplied with a 10 amp plug and 2 m lead Before ins 220,240 volts a c, 50 Hz, single phase supply tolerances		
Power supply	220-240 volts a.c. 50 Hz, single phase supply	Linear dimensions	
Current draw	2.0 amps (includes unit 1.5 amps)	Less than 1 metre	
REFRIGERATION		More than 1 metre	
Controller	SCS Connect (SKOPE-connect [™] compatible)		
Connectivity interface	Bluetooth [®] wireless technology	Less than 1 metre	
Refrigeration system	Top mounted, integral, removable refrigeration cartridge	More than 1 metre	
5 ,	(part number UTKCNI-0018)	more than I mote	
Refrigerant	R290/90 g (natural refrigerant)	Ventilation requireme	
Nominal capacity	650 watts	Тор	
Heat rejection (Avg/peak)	165 watts/205 watts	Sides	
Drainage	No plumbing required	Back	

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

DIMENSIONS		
	External	Internal
Height	1985 mm*	1395 mm
Width	1220 mm	1100 mm
Depth	760 mm	600 mm
Floor area	0.93 m ²	1
Weight	159 kg	
Gross volume	921 L	
Net volume	712 L	

With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985 mm
Supplied height adjustable legs	1995-2035 mm
No castors or legs	1850 mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet di	imensions		
Less than 1 metre	±5 mm			
More than 1 metre	-5 mm to +10 mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5 mm	+15 mm		
More than 1 metre	-5 mm to +10 mm	+15 mm		

Ventilation requirements		
Тор	300 mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0589 Rev. 2.13 Jul. 2022

