
specifications


TCE1000N

Top Mount, 2 Glass Door, Upright Fridge

SKOPE ID: EM10BY

Project: Item No:



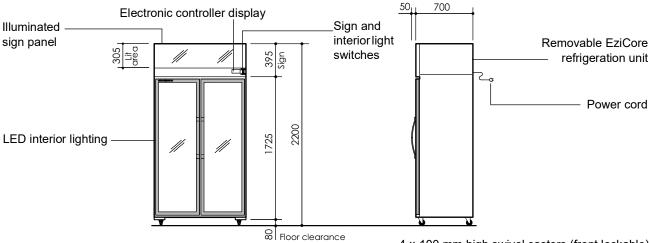

4 × 100 mm high swivel castors (front lockable)

CABINET

Doors 2 × self-closing, double-glazed, argon-filled, toughened safety glass swing

doors (hinged left and right hand)

2 × door openings: 1570 mm high × 450 mm wide Internal door opening

4 × adjustable height, full width wire shelves: 1004 mm wide × 457 mm deep Shelves Sign

Illuminated sign

Powdercoated galvanised steel Material

PERFORMANCE

Max. ambient temp. 35°C 0°C to 5°C Temperature range 65 dB (A) Noise measurement **GEMS** rating class M1

GEMS energy consumption 4.51 kWh/24 h

GEMS annual running cost \$494 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5

Interior lighting 20.5 W switched LED strip lighting in door frame Sign lighting 3.5 W switched LED strip lighting in sign panel Power cord Supplied with 10 amp plug and 2.3 m lead Power supply 220-240 volts a.c. 50 Hz, single phase supply Current draw 3.0 amps (includes unit 2.6 amps)

REFRIGERATION

Controller Electronic controller with digital temperature display

Connectivity interface n.a.

Refrigeration system Top mounted, integral, removable EziCore refrigeration cartridge

(part number UTHCNI-0038)

Refrigerant R290/95 g (natural refrigerant)

Nominal capacity 740 watts

Heat rejection (Avg/peak) 190 watts/210 watts Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

DIMENSIONS

	External	Internal
Height	2200 mm	1570 mm
Width	1130 mm	1030 mm
Depth	750 mm*	554 mm
Floor area	0.85 m ²	
Weight	205 kg	
Gross volume	896 L	

^{*} Depth of 750 mm includes door handles

Dimensional tolerances

Lincar dimensions	Overell echines dim	!
tolerances:		
Before installing this	cabinet allow the follow	ving dimensional

Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5 mm		
More than 1 metre	-5 mm to + 10 mm	-5 mm to + 10 mm	
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5 mm	+15 mm	
More than 1 metre	-5 mm to + 10 mm	+15 mm	

Ventilation requirements	
Тор	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0673 Rev. 1.0 Jul. 2020

