## specifications




## **TME1000N-A Series**

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project:

Item No:

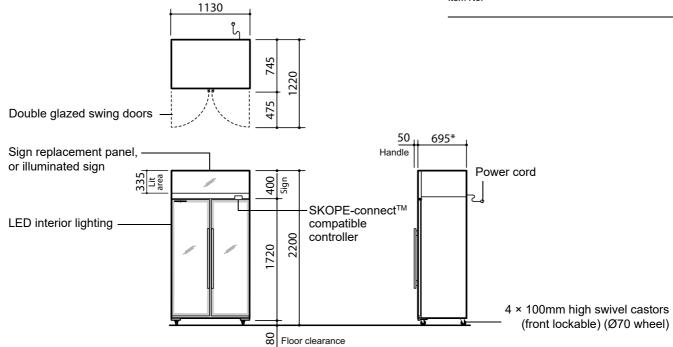

**CABINET** 

Model ID TME1000N-A TME1000N-AC

Doors 2 × self-closing, double glazed, single Low-E, lockable, argon filled,

toughened safety glass swing doors (hinged LH, RH)

Internal door opening 2 × door openings: 1570mm high × 450mm wide

Shelves 5 × adjustable height wire shelves: 10 × adjustable height wire shelves:

1015mm wide × 470mm deep

500mm wide × 470mm deep

Sign replacement panel Illuminated sign

Sign Material Powdercoat galvanized steel

**PERFORMANCE** 

Max. ambient temp. 40°C

1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C) Temperature range

**GEMS** class

GEMS energy consumption 3.79 kWh/24h 3.97 kWh/24h

GEMS annual running cost \$415 p.a.(@ \$0.30/kWh) \$435 p.a.(@ \$0.30/kWh)

**ELECTRICAL** 

Electrical safety climate class 5

Interior side lighting 2 × 1400mm, 15W LED 2 × 1400mm, 15W LED 1 × 1060mm, 12W LED Sign lighting

Power cord Supplied with 2.3m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-

0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 165 Watts/235 Watts No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

## **DIMENSIONS** External Internal Height 2200mm 1570mm Width 1130mm 1030mm Depth 745mm 554mm $0.84m^{2}$ Floor area 225kg Weight 980L Gross volume

Depth 695mm excludes removable door handle and door

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required



