specifications


SIR Refrigeration

TME650N-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge

Project:

Item No:

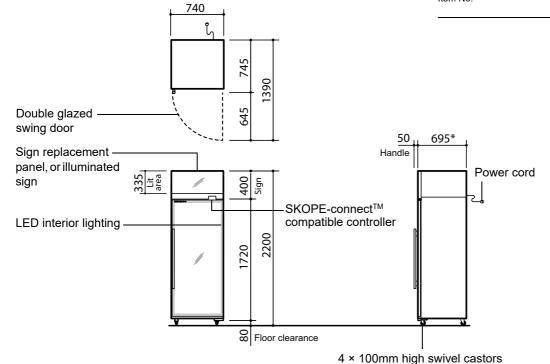

CABINET

Model ID TME650N-A TME650N-AC

Doors 1 × self-closing, reversible, double glazed, single Low-E, lockable, argon

filled, toughened safety glass swing door (hinged RH)

Internal door opening 1 × door openings: 1570mm high × 620mm wide

Shelves 5 × adjustable height wire shelves: 625mm wide × 470mm deep

Sign Sign replacement panel Illuminated sign

Material Powdercoat galvanized steel

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

GEMS class M1

GEMS energy consumption 2.36 kWh/24h 2.46 kWh/24h

GEMS annual running cost | \$258 p.a.(@ \$0.30/kWh) | \$269 p.a.(@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5

Interior side lighting 1 × 1400mm, 15W LED 1 × 1400mm, 15W LED

Sign lighting n.a.

1 × 670mm, 7W LED

Power cord Supplied with 2.3m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.9 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-

0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 105 Watts/150 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	2200mm	1570mm	
Width	740mm	640mm	
Depth	745mm	554mm	
Floor area	0.55m ²	•	
Weight	170kg		
Gross volume	610L		

(front lockable) (Ø70 wheel)

* Depth 695mm excludes removable door handle and door

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0517 Rev. 2.4 Jul. 2020



